

Vertical Balers

B-series



Baler B50 XL SD

Efficient and quick waste handling

Ideal for large amounts of materials. Due to the wide Sliding Door of 1.82 metres and deep chamber of 1.1 metres, there is no need to break down boxes before loading.

Optimized for truckloads

The compacted bales are optimized for transport because they can be stacked two and two instead of three and three.

Highlights

- Extra-large chamber
- 8 wire tying for a more stable bale
- Standard with a Sliding Door that opens automatically
- Bales optimized for transport
- Compacted bales measure 1825 x 1066 x 1200-1300 mm
- Stack bales 2 and 2 instead of 3 to optimize a truck load
- Powder Coating provides durable finish in many colors

Optional Extras



Custom colors are available.



BRA-IN fleet monitoring system is included and gives you the ability to monitor the throughput of your machine remotely.



You can use either plastic strapping or steel wires to tie the finished bales.

Product details

Baler B50 XL SD



Whisper

30 dB



Refrigerator

50 dB




B50 XL SD

62-64 dB



Other balers

75 dB





Cars on highway

100 dB



Turbojet engine

160 dB

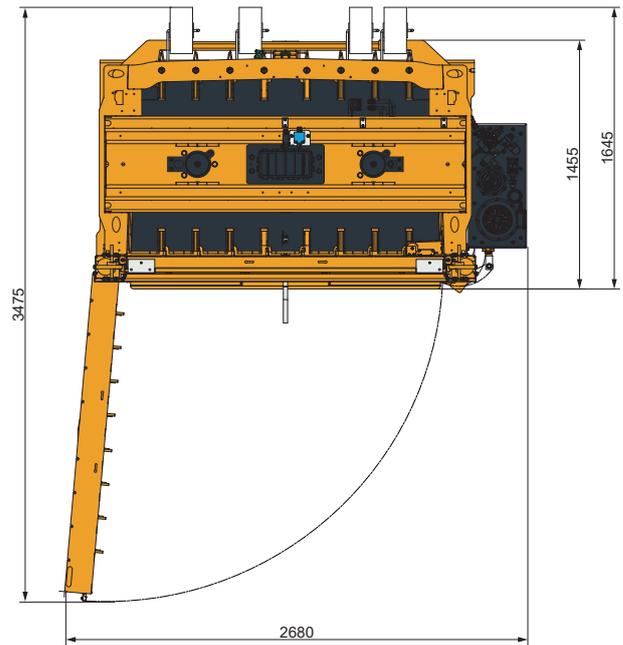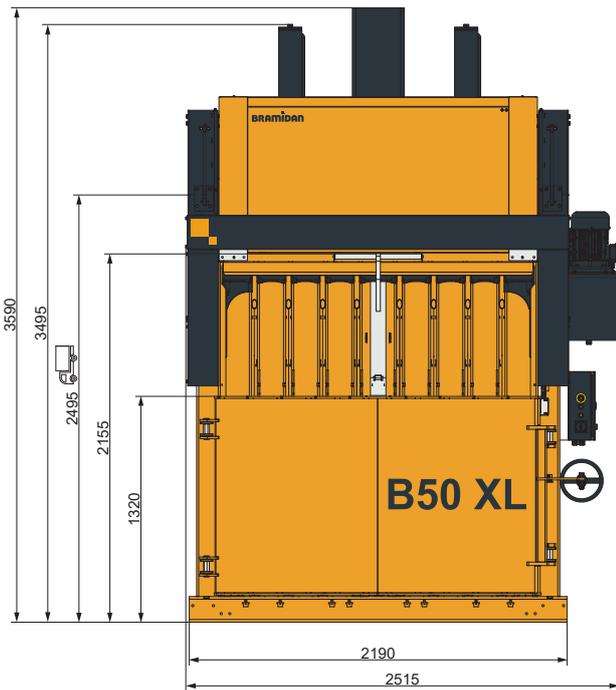

Technical specifications

Bale size WxDxH (mm)	1850 x 1100 x 1200-1300
Feed opening WxH (mm)	1825 x 670
Power supply	3x400V 50Hz 16A
Motor (kW)	5.5
Cycle time avg. (sec)	26
Dimensions WxDxH (mm)	2495 x 1660 x 3590 / 2540
Weight (kg)	3250
Stroke (mm)	1100
Number of ties	8
Type of tying	Twine / Steel wire
Full bale light	Yes
Bale eject	Automatic



Bale weight
Cardboard (kg) 650-800
Plastic foil (kg) 650-800



Press force 50 t



Noise level 62-64 dB



Waste types
Cardboard, plastic foil, paper.

BRAMIDAN
bramidan.com

Bramidan A/S
Industrivej 69
6740 Bramming
Denmark
Tel. +45 7517 3266
bramidan@bramidan.dk