

Vertical Balers

X-series



Baler X25 FD

Fits into tight spaces and low ceilings

Internal cross cylinders make this baler very low in height and makes it easy to install.

Achieve high bale weight

The superior press force combined with a long stroke helps you achieve a high bale weight.

Highlights

- For various types of material – even expandable
- Large and wide chamber
- Retainers prevent in-chamber material expansion
- Short cycle time for fast clean up
- Moving parts are protected inside the machine
- Low overall height
- Powder Coating provides durable finish in many colors

Optional Extras



Get online access to your balers with our monitoring system called BRA-IN.



Personalize your baler with a custom RAL colour of your choice.



A galvanized surface makes your baler environmentally resistant.

Product details

Baler X25 FD



Whisper

30 dB



Refrigerator

50 dB




X25 FD

59-60 dB



Other balers

75 dB





Cars on highway

100 dB



Turbojet engine

160 dB

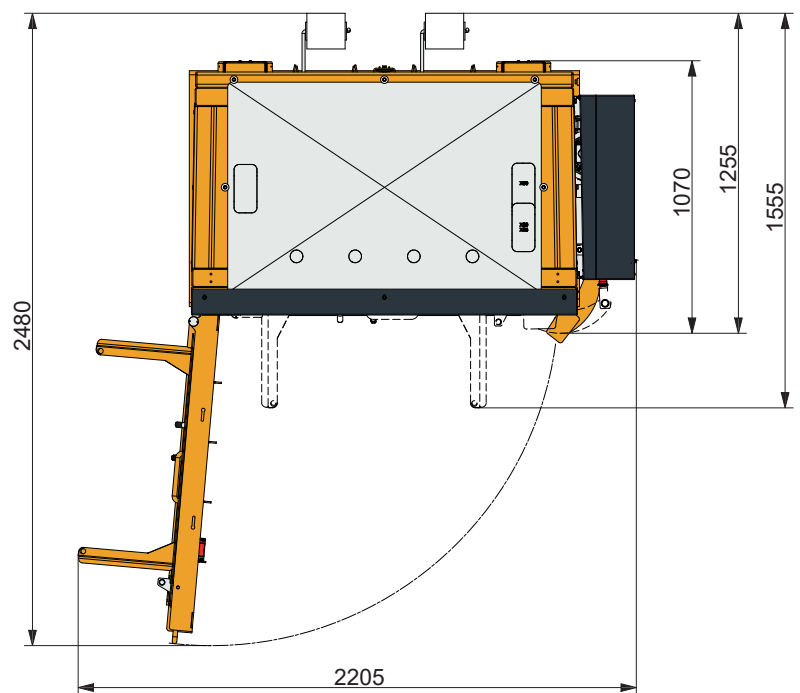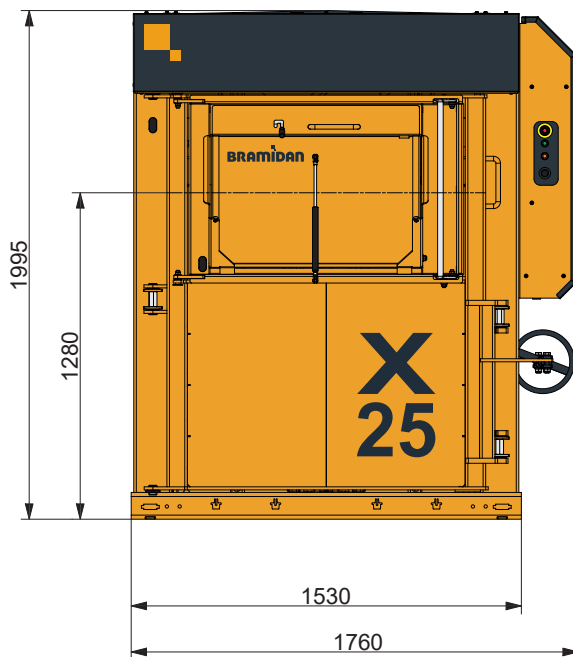

Technical specifications

Bale size WxDxH (mm)	1200 x 800 x 800
Feed opening WxH (mm)	830 x 435
Power supply	3x400V 50Hz 16A
Motor (kW)	4.0
Cycle time avg. (sec)	23
Dimensions WxDxH (mm)	1745 x 1555 x 1995
Weight (kg)	1450
Stroke (mm)	950
Number of ties	4
Type of tying	Twine / Steel wire
Full bale light	Yes
Bale eject	Automatic



Bale weight

Cardboard (kg)	200-300
Plastic foil (kg)	250-350



Press force	25 t
-------------	------



Noise level	59-60 dB
-------------	----------



Waste types

Cardboard, plastic foil, paper, PET bottles, alu cans, tin cans, hard plastic, textile, EPS.

BRAMIDAN
bramidan.com

Bramidan A/S
Industrivej 69
6740 Bramming
Denmark
Tel. +45 7517 3266
bramidan@bramidan.dk