

Vertical Balers

X-series



Baler X25 Galvanized

For challenging or wet environments

This baler is especially suitable for environments where there are no special hygienic requirements for stainless steel, but where demands on machine surface are so severe that an ordinary painted baler will have a short lifetime.

Highlights

- Galvanized according to DS/EN 1461:2009
- Resistant surface
- No flakey paint
- Suitable to be placed outdoors
- Easy installation
- Low overall height

Optional Extras



Restrict the access to your baler with a digital auto lock. Use a key tag or personal code.



Gain remote control of your baler with our intelligent fleet monitoring system, BRA-IN.



A flap door helps you handle bottles and cans easily without backrun.

Product details

Baler X25 Galvanized



Whisper

30 dB



Refrigerator

50 dB




X25 Galvanized

59-60 dB



Other balers

75 dB





Cars on highway

100 dB



Turbojet engine

160 dB

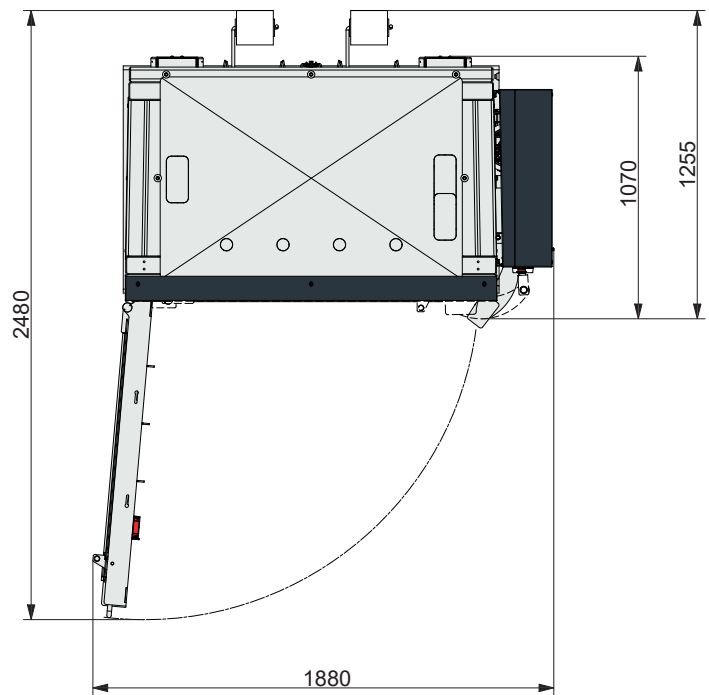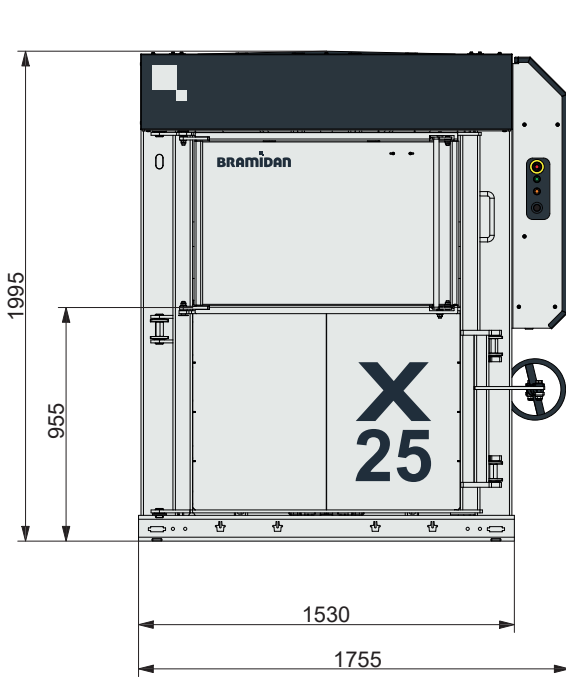

Technical specifications

Bale size WxDxH (mm)	1200 x 800 x 800
Feed opening WxH (mm)	1090 x 530
Power supply	3x400V 50Hz 16A
Motor (kW)	4.0
Cycle time avg. (sec)	23
Dimensions WxDxH (mm)	1755 x 1255 x 1995
Weight (kg)	1410
Stroke (mm)	950
Number of ties	4
Type of tying	Twine / Steel wire
Full bale light	Yes
Bale eject	Automatic



Bale weight

Cardboard (kg)	200-300
Plastic foil (kg)	250-350



Press force

25 t



Noise level

59-60 dB



Waste types

Cardboard, plastic foil, paper, PET bottles, alu cans, tin cans, hard plastic, liquid, EPS.

BRAMIDAN
bramidan.com

Bramidan A/S
Industrivej 69
6740 Bramming
Denmark
Tel. +45 7517 3266
bramidan@bramidan.dk