

Vertical Balers

X-series

Baler X30 Galvanized FD

Suitable for demanding environments

The DS/EN 1461:2009 galvanized coating is ideal for environments where the machine will be exposed to water and other liquids e.g. residuals from PET.


Highlights

- Hot-dip galvanized
- Meets DS/EN 1461:2009 standard
- Suitable for PET bottles and aluminium and food cans
- Options for your specific needs
- Combine baling and draining in one step

Optional Extras



A draining system leads liquids out of your baler during compaction of wet waste.

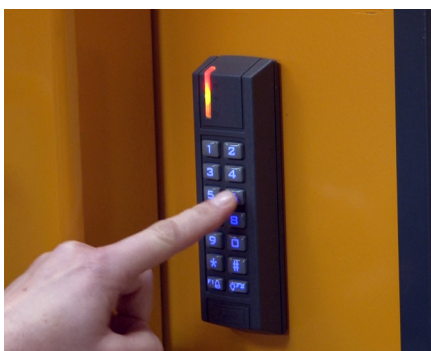

Prevent unauthorized people from operating your baler with a digital auto lock.



Gain remote control of your baler with our intelligent fleet monitoring system, BRA-IN.

Product details

Baler X30 Galvanized FD



Whisper

30 dB



Refrigerator

50 dB



X30 Galvanized FD

59-60 dB



Other balers

75 dB





Cars on highway

100 dB



Turbojet engine

160 dB

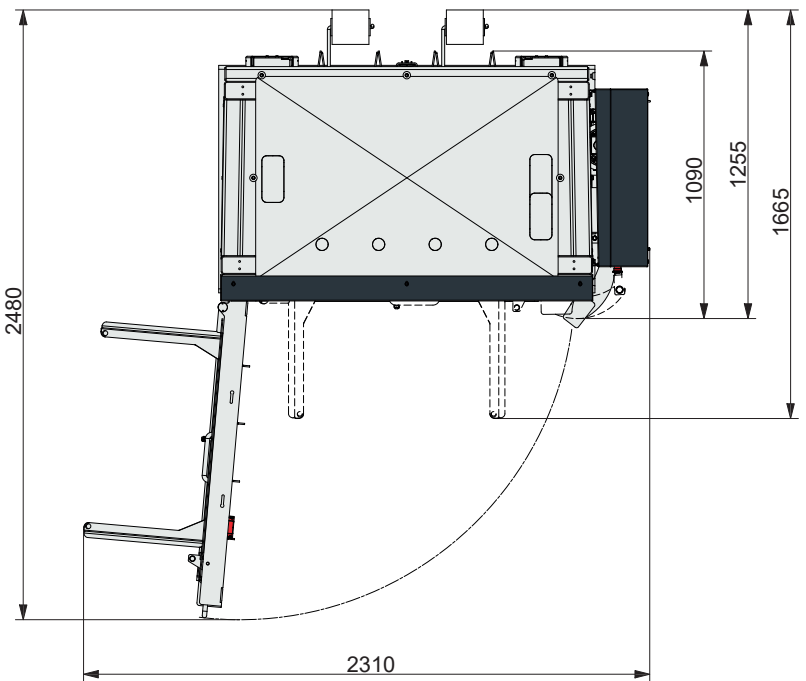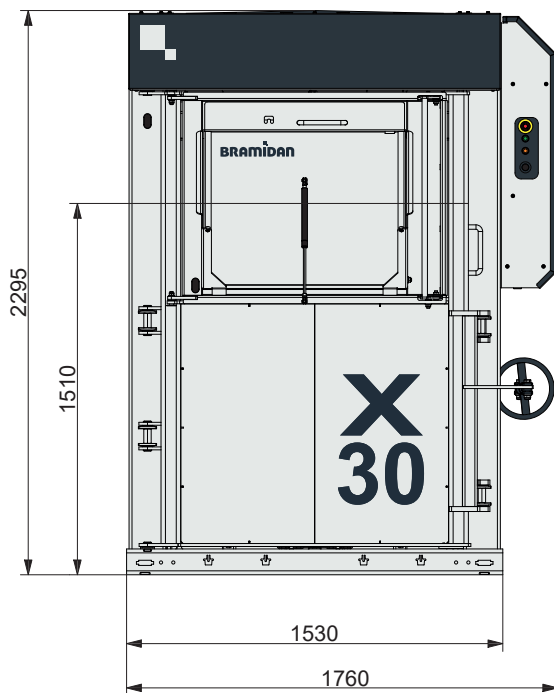

Technical specifications

Bale size WxDxH (mm)	1200 x 800 x 1000
Feed opening WxH (mm)	830 x 550
Power supply	3x400V 50Hz 16A
Motor (kW)	4.0
Cycle time avg. (sec)	25
Dimensions WxDxH (mm)	1760 x 1665 x 2295
Weight (kg)	1750
Stroke (mm)	940
Number of ties	4
Type of tying	Twine / Steel wire
Full bale light	Yes
Bale eject	Automatic



Bale weight

Cardboard (kg)	275-350
Plastic foil (kg)	325-425



Press force	30 t
-------------	------



Noise level	59-60 dB
-------------	----------



Waste types

Cardboard, plastic foil, paper, PET bottles, alu cans, tin cans, hard plastic, liquid, EPS.

BRAMIDAN
bramidan.com

Bramidan A/S
Industrivej 69
6740 Bramming
Denmark
Tel. +45 7517 3266
bramidan@bramidan.dk