

Vertical Balers

X-series

Baler X25 HD Galvanized



Withstands severe environments

Perfect for customers whose environments place severe demands on the machinery. When our standard paint will not suffice and there are no special hygienic requirements for stainless steel, the galvanized surface will lengthen overall lifetime.

Highlights

- Galvanized according to ASTM A123/A123M standards
- Surface is resistant to harsh demands
- Free of flaking paint
- Suitable for both indoors and outdoors
- Easy to install
- Low overall height

Optional Extras



Restrict the access to your baler with a digital auto lock. Use a key tag or personal code.



Gain remote control of your baler with our intelligent fleet monitoring system, BRA-IN.



A flap door helps you handle bottles and cans easily without backrun.

Product details

Baler X25 HD Galvanized



Whisper

30 dB



Refrigerator

50 dB



X25 HD Galvanized

59-60 dB



Other balers

75 dB





Cars on highway

100 dB



Turbojet engine

160 dB

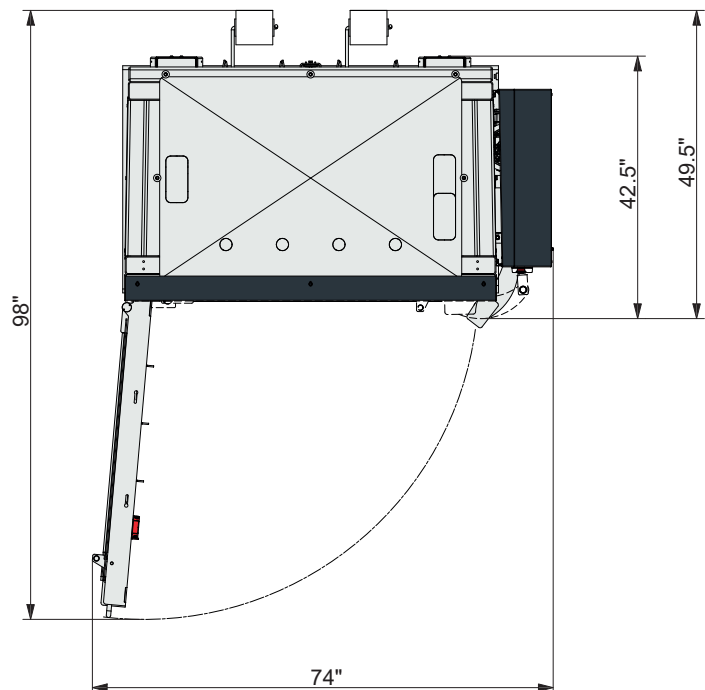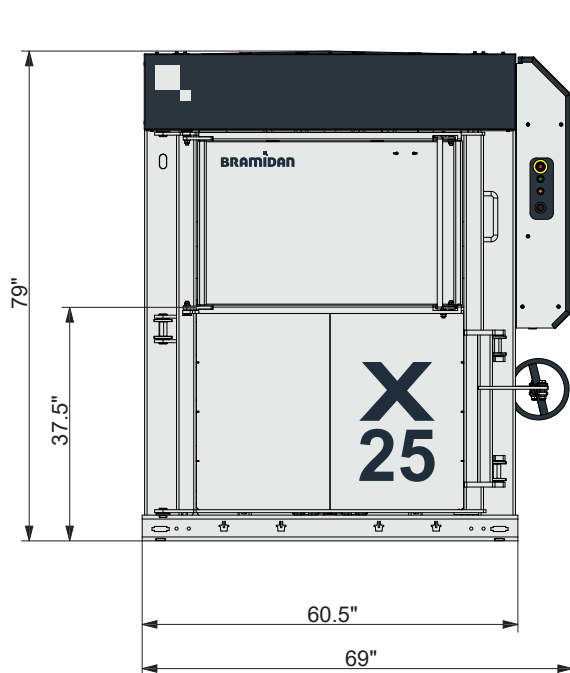

Technical specifications

Bale size WxDxH (inch)	48 x 30 x 30
Feed opening WxH (inch)	43 x 21
Power supply	208/230/480V 3-phase 60Hz
Motor (HP)	5.5
Cycle time avg. (sec)	23
Dimensions WxDxH (inch)	69 x 50 x 79
Weight (lbs)	3,150
Stroke (inch)	37
Number of ties	4
Type of tying	Twine / Steel wire
Full bale light	Yes
Bale eject	Automatic



Bale weight

Cardboard (lbs)	500-650
Plastic foil (lbs)	550-775



Press force	55,200 lbs
-------------	------------



Noise level	59-60 dB
-------------	----------



Waste types

Cardboard, plastic foil, paper, PET bottles, alu cans, tin cans, hard plastic, liquid, EPS.