

## Vertical Balers

### X-series



## Baler X50 Galvanized FD

### For wet environments

For applications with no hygienic requirements for stainless, but where demands on surface treatment are so severe that a normal painted baler would have a short lifetime.


### Highlights

- DS/EN 1461:2009 galvanized
- For all types of recyclables
- Suited for PET bottles, aluminium and food cans, and plastic jugs
- Combination of baling and draining of residual liquids available

### Optional Extras



A draining system leads liquids out of your baler during compaction of wet waste.

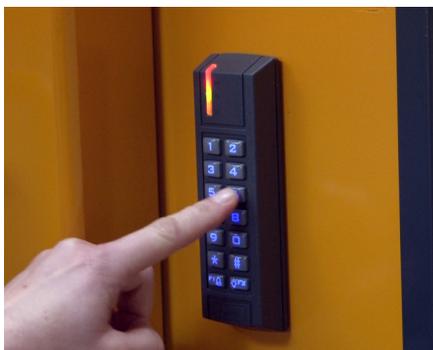

Prevent unauthorized people from operating your baler with a digital auto lock.



Gain remote control of your baler with our intelligent fleet monitoring system, BRA-IN.

# Product details

## Baler X50 Galvanized FD



Whisper

30 dB



Refrigerator

50 dB




**X50 Galvanized FD**

**62-64 dB**



Other balers

75 dB





Cars on highway

100 dB



Turbojet engine

160 dB

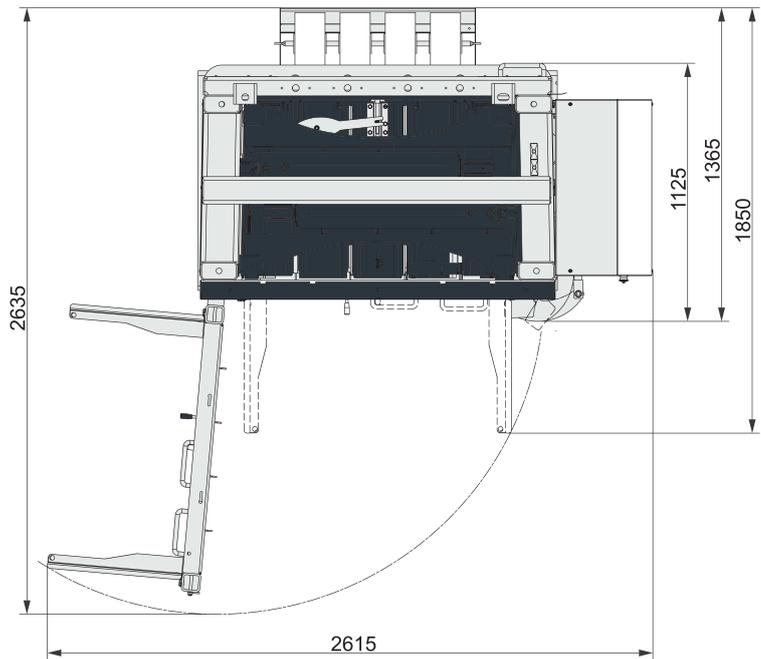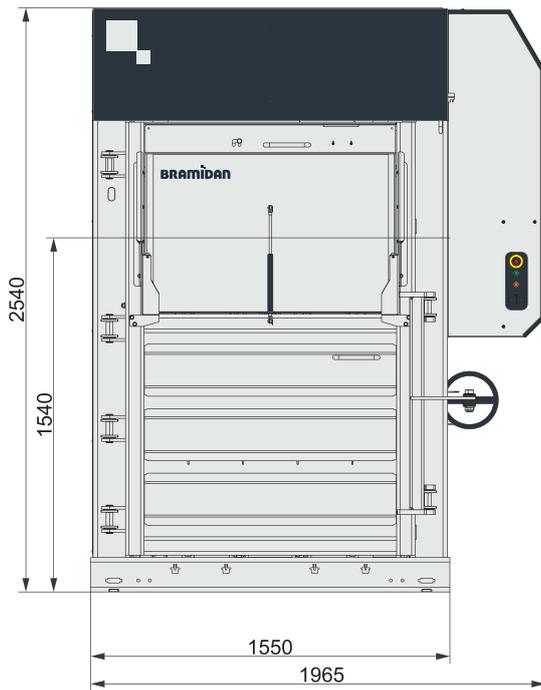

### Technical specifications

Bale size WxDxH (mm)	1200 x 800 x 1100
Feed opening WxH (mm)	966 x 485
Power supply	3x400V 50Hz 16A
Motor (kW)	5.5
Cycle time avg. (sec)	22
Dimensions WxDxH (mm)	1965 x 1850 x 2540
Weight (kg)	2690
Stroke (mm)	1210
Number of ties	4
Type of tying	Twine / Steel wire
Full bale light	Yes
Bale eject	Automatic



### Bale weight

Cardboard (kg)	350-450
Plastic foil (kg)	400-500



### Press force

50 t



### Noise level

62-64 dB



### Waste types

Cardboard, plastic foil, paper, PET bottles, alu cans, tin cans, hard plastic, liquid, EPS.

**BRAMIDAN**  
bramidan.com

Bramidan A/S  
Industrivej 69  
6740 Bramming  
Denmark  
Tel. +45 7517 3266  
bramidan@bramidan.dk